

大榮牌雙推力軸承泵浦

DA-RONG DOUBLE PUSH BEARING SUBMERSIBLE PUMPS

SUS
60HZ



FC
60HZ

AC
Series

井用系列

FOR DEEP WELLS

性能曲線表

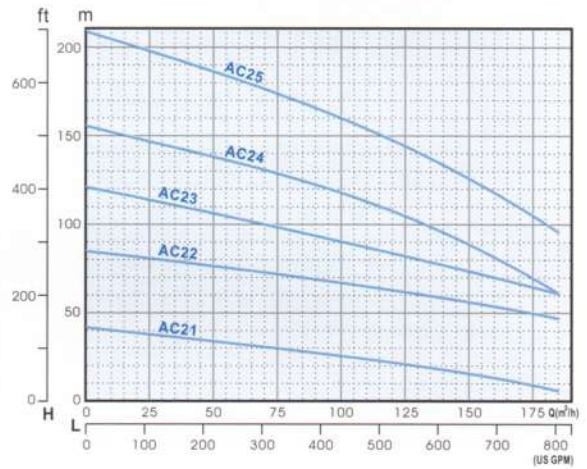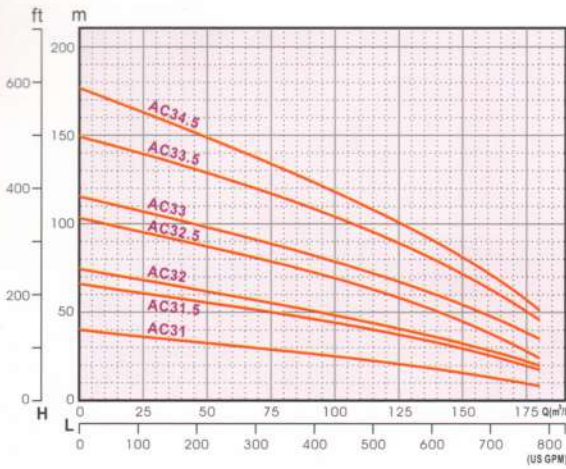

尺寸規格表

適井用徑	型式 TYPE	A mm	B mm	C mm	D mm	E mm	φ M mm	φ P mm
10"	AC31	1115	632	483	150	205	165	200
	AC31.5	1413	760	653	150	205	165	200
	AC32	1455	802	653	150	205	165	200
	AC32.5	1718	895	823	150	205	195	200
	AC33	1802	979	823	150	205	195	200
	AC33.5	2183	1190	993	150	205	195	200
	AC34.5	2453	1290	1163	150	205	195	200
12"	AC33.5	2043	1050	993	150	205	216.3	200
	AC34.5	2293	1130	1163	150	205	216.3	200
10"	AC21	1173	690	483	150	205	165	200
	AC22	1548	895	653	150	205	195	200
	AC23	2013	1190	823	150	205	195	200
	AC24	2283	1290	993	150	205	195	200
12"	AC23	1873	1050	823	150	205	216.3	200
	AC24	2123	1130	993	150	205	216.3	200
	AC25	2463	1300	1163	150	205	216.3	200

性能規格表

適井用徑 (In)	Model	Output	Disc.	Head	Capacity	Max. H	Max. C	滿載電流		
	型式 TYPE	馬力 HP	口徑 Inch	標準揚程 M	標準水量 GPM	最高揚程 M	最大水量 GPM	3/220	3/380	3/440
10"	AC31	15	5-6	19	565	40	790	45	25	22
	AC31.5	25	5-6	29	565	57	790	70	40	37.5
	AC32	30	5-6	39	565	74	790	84	48	42
	AC32.5	40	5-6	56	565	103	790	112	64	56
	AC33	50	5-6	65	565	115	790	140	80	70
	AC33.5	60	5-6	87	565	149	790	168	96	84
	AC34.5	75	5-6	100	565	177	890	210	120	105
10"	AC21	20	5-6	19	610	42	890	56	32	30
	AC22	40	5-6	59	610	85	890	112	64	56
	AC23	60	5-6	77	610	111	890	168	96	84
	AC24	75	5-6	90	610	152	890	210	120	105
	AC25	100	5-6	133	610	199	890	260	160	140



大榮電機股份有限公司
DA-RONG ELECTRIC CO., LTD.