

SUS
60HZ


BC18
Series

井用系列 FOR DEEP WELLS

大榮牌全不銹鋼泵浦

DA-RONG STAINLESS STEEL SUBMERSIBLE PUMPS

性能曲線表

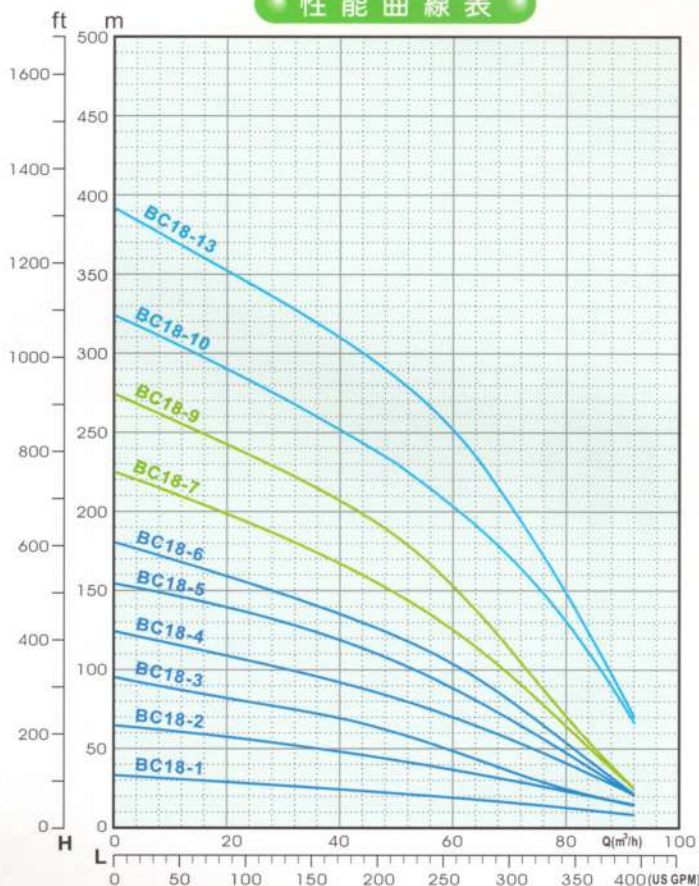

尺寸規格表

適井用徑	型式 TYPE	A mm	B mm	C mm	D mm	E mm	φM mm	φP mm
8"	BC18-1	728	448	280	95	173	165	165
	BC18-2	922	582	340	95	173	165	165
	BC18-3	1032	632	400	95	173	165	165
	BC18-4	1150	690	460	95	173	165	165
	BC18-5	1280	760	520	95	173	165	165
	BC18-6	1382	802	580	95	173	165	165
10"	BC18-7	1535	895	640	95	173	195	165
	BC18-9	1739	979	760	95	173	195	165
	BC18-10	2055	1190	865	140	173	195	165
12"	BC18-10	1915	1050	865	140	173	216.3	165
	BC18-13	2175	1130	1045	140	173	216.3	165

性能規格表

適井用徑 (in)	Model 型式 TYPE	Output 馬力 HP	Disc. 口徑 Inch	Head 標準揚程 M	Capacity 標準水量 GPM	Max. H 最高揚程 M	Max. C 最大水量 GPM	滿載電流 3/220	滿載電流 3/380	滿載電流 3/440
8"	BC18-1	5	4	20	220	32	400	15	8.5	7.5
	BC18-2	10	4	32	220	63	400	30	17	15
	BC18-3	15	4	58	220	93	400	45	25	22
	BC18-4	20	4	78	220	123	400	56	32	30
	BC18-5	25	4	101	220	153	400	70	40	37.5
	BC18-6	30	4	118	220	181	400	84	48	42
10"	BC18-7	40	4	144	220	224	400	112	64	56
	BC18-9	50	4	180	220	273	400	140	80	70
12"	BC18-10	60	4	224	220	324	400	168	96	84
	BC18-13	75	4	279	220	393	400	210	120	105



大榮電機股份有限公司
DA-RONG ELECTRIC CO., LTD.